

Anchoring Angle
For Lockers without legs

use a locker anchoring angle (running from front to rear on the inside bottom of the locker) providing a bearing surface for the fasteners which are connected to the floor or locker base. For the typical continuous row locker installation, order one locker anchoring angle for each end of a row, plus sufficient quantity to provide angles on 36" centers. On single row installations where backs are against a wall, lockers should be suitably wall anchored as detailed in assembly instructions packed with lockers and below installation drawings.

- No. 5872** - For 12"d lockers
- No. 5873** - For 15"d lockers
- No. 5874** - For 18"d lockers
- No. 5875** - For 21"d lockers





Locker Foot
For Lockers with legs

When backs are exposed (free standing) a locker foot is recommended for all locker legs. When backs are against a wall and suitably wall anchored, locker feet are recommended on front legs only. For more details, see assembly instructions packed with lockers.

No. 5870




"Kitchen Cabinet Style" Bases are 4" high, and give a smooth, unbroken appearance to lockers without legs.

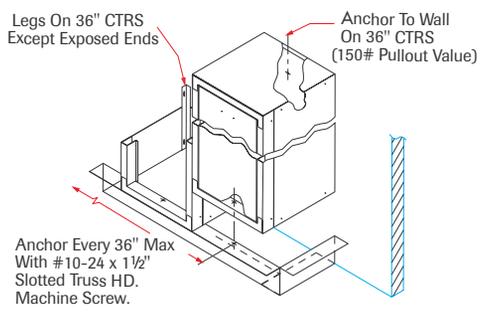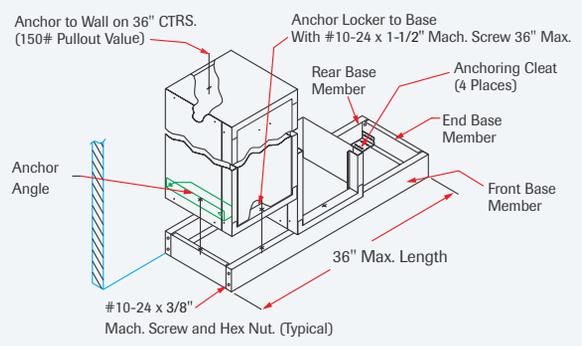

"Z" Type Bases offer added toe space and effective support using rugged 12-gauge steel. Adds 4" to overall locker height.



Closed Style Bases fit in the 6" high spaces between legs when furnished. They provide finished appearance and facilitate cleaning.

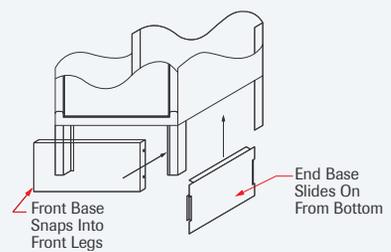

NOTE: For conditions other than outlined above, please contact your local Lyon factory representative.