



### Laminated Hardwood Top

- Kiln-dried hard maple, birch or beech grade selects and better.
- 1-3/4" thick, 28" deep with 3/16" rounded edges
- Flush to housing sides
- Finished with a two-coat moisture resistant sealer
- Field or factory installed, add an I for Installed or a K for Kitted to the suffix of the part number

Cat. No.*	Housing	Top Size
<b>NFNHT2230NN00_</b>	Slender	22-13/16"w
<b>NFNHT3030NN00_</b>	Standard	30"w
<b>NFNHT3630NN00_</b>	Medium	36-3/8"w
<b>NFNHT4530NN00_</b>	Extra	44-3/8"w
<b>NFNHT6030NN00_</b>	Double	59-5/8"w



### External Lock Bar


- Secures all drawers with hinged bar (*padlock not included*)
- Ideal for mobile applications or use in high-risk locations
- Field or factory installed (*drilling required—fasteners supplied*)
- Specify color (*add the two (2) letter digit as a prefix from step 1 on page 40*)

Cat. No.*	Housing
<b>240ELB270</b>	Desk
<b>240ELB310</b>	Table
<b>240ELB350</b>	Bench
<b>240ELB400</b>	Mid-Range
<b>240ELB490</b>	Counter
<b>240ELB680</b>	Eye-Level



### Deduct Forklift Base

- Removes forklift channels and closure strips from housing
- Decreases overall height of housing by 2-1/8"
- Cost effective option when using casters
- Cost effective option when stacking cabinets
- Can still be anchored without drilling holes
- Factory removed only

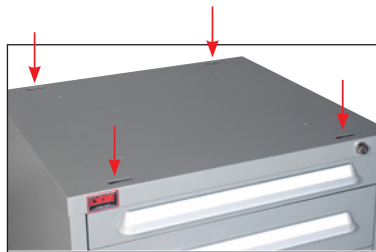

### Cabinet Stacking Holes

*(Only required if stacked cabinet features Forklift Base)*

- Pierced slots in cabinet top pan
- Factory installed only
- Fasteners supplied with cabinet

\*Order entry note: List the part number of option(s) chosen directly below the housing part numbers.